

Winch Mounting Systems

The Endurance 12.0 has the same mounting bolt pattern as other WARN mid-frame winches. To find the right mounting system for your vehicle, call WARN customer service for the latest applications, or check out our Web site: www.warn.com

Accessories

Wireless Winch Control

OPERATE YOUR WINCH WITH NO STRINGS (OR WIRES) ATTACHED

- Operate your truck's winch remotely from up to 50' away.
- The system will work with any WARN winch with a 5 wire electrical system.
- For easy installation, the Wireless Control System comes with a receiver with an internal antenna and all of the necessary mounting hardware is included.
- Weather-resistant transmitter has two large buttons that make it easy to operate, even while wearing gloves, and its two-color LED provides operator feedback.



PN 76080

Heavy-Duty Winch Accessory Kit

FOR HEAVY-DUTY WORK (24,000 LBS.), THIS IS WHAT TO CARRY. ALWAYS.

- Includes snatch block, tree protector, shackle, gloves, choker chain, and 3" x 30' recovery strap.
- Includes a compact camouflage soft case.



PN 29460 (Camouflage)




Performance Specs

Line Pull Lbs. (kg)	Line Speed ft./min. (m/min)	Motor Current	Pull by Layer layer/lbs. (kg)
0	39.5 (12.0)	47.8 amps	1/12,000 (5440)
2000 (910)	15.1 (4.60)	127.0 amps	2/9517 (4317)
4000 (1810)	10.4 (3.17)	192.0 amps	3/7886 (3577)
6000 (2720)	7.7 (2.35)	257.0 amps	4/6732 (3054)
8000 (3630)	6.1 (1.86)	316.0 amps	
9500 (4310)	4.8 (1.46)	358.0 amps	
12000 (5440)	3.4 (1.04)	429.0 amps	

Specifications/Part Numbers

Part Number	73010
Rated line pull:	12,000 lbs. (5440 kg)
Motor:	Series-Wound 4.6 hp 12V
Remote Control:	Remote switch, 12' (3.7m) lead
Geartrain:	3-stage planetary
Gear Ratio:	216:1
Clutch (freespooling):	Sliding ring gear
Brake:	Mechanical cone brake
Drum diameter/Length:	2.5" diam./9" length (6.4cm/22.9 cm)
Wire Rope:	80' of 3/8" (24m of 9.5mm diam.)
Fairlead:	Roller
Recommended Battery:	650 CCA minimum for winching
Battery Leads:	2 gauge, 72" (1.83m)
Finish:	High-gloss black powdercoat
Nuts/Bolts:	PN 39625

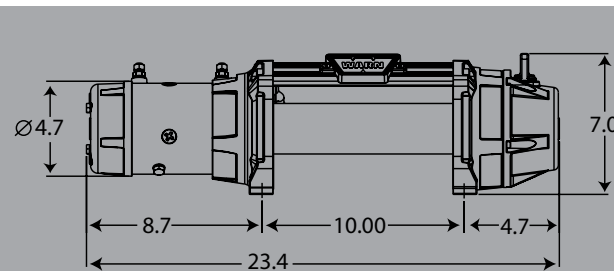

WARN INDUSTRIES, INC.
12900 S.E. Capps Road
Clackamas, OR USA 97015-8903

Customer Service: 800-543-9276
Fax: 503-722-3000
International Sales Support: 503-722-3008
International Fax: 503-722-3005


www.warn.com

© 2008 Warn Industries, Inc. WARN® and the WARN logo are trademarks of Warn Industries, Inc.

ENDURANCE 12.0 WINCH



REDEFINE POWER.
REDEFINE SPEED.

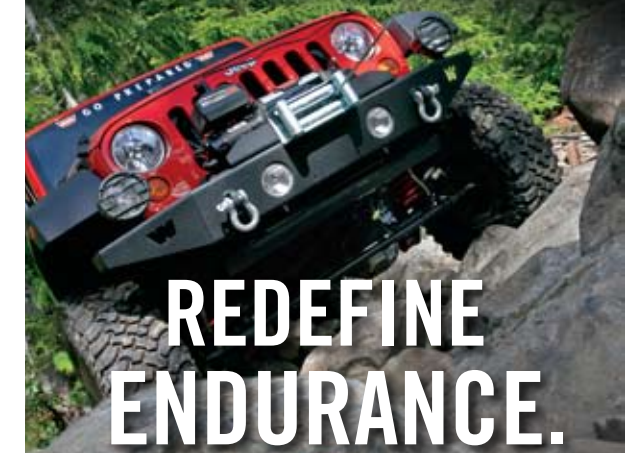

REDEFINE
ENDURANCE.



12,000 pounds of pulling power.
0 pounds of quit.

THE WARN ENDURANCE 12.0 A NEW WAY TO KEEP YOUR COOL WHILE WINCHING.



Once again, Warn Industries is set to revolutionize the winch world. We've developed a product with more stamina than any other winch of its kind. More power. More speed. More endurance. This is no ordinary winch: This is the WARN® Endurance 12.0. This winch gives you 12,000 lbs. of pulling capacity with an increased duty cycle – the secret is its innovative cooling system.

Here's how it works: The specially designed cooling fan (which is mounted under the vehicle's hood) automatically turns on when the winch's motor reaches a certain temperature. The fan forces air through a hose and directly into the winch's motor housing, cooling the motor. The air then flows out of the motor housing via a second hose and is discharged.

The Endurance 12.0 has other outstanding features including:

- Heavy-duty contactor for increased durability and reliability
- High-speed, three-stage planetary geartrain for fast, smooth, and dependable operation
- Durable glossy-black powder-coated finish for good looks and corrosion resistance
- Stainless-steel clutch lever and hardware for protection against the elements
- Extreme-duty winch sealing to keep the elements out
- Limited lifetime warranty backed by a world-wide service organization.

When you want a winch that'll really go the distance, you want a winch with serious endurance: The WARN Endurance 12.0

